


**1342nm Infrared DPSS Low Noise Laser**



†**Specifications**

<b>Product Code</b>	SSL - 1342 - XXXX - LN
<b>Wavelength [ nm ]</b>	1342
<b>Output Power [ mW ]</b>	4200 - 7000
<b>Transverse Mode</b>	TEM <sub>00</sub> / CW
<b>Operating Temperature [ °C ]</b>	+10 - +35
<b>Storage Temperatures [ °C ]</b>	-10 - +45
<b>Warm-up Time [ minutes ]</b>	< 15
<b>Power Stability [ rms, over 4 hours ]</b>	5%, 3%, 1%
<b>M<sup>2</sup> Factor</b>	< 3.0
<b>Beam Diameter At The Aperture [ mm ]</b>	~ 3.5
<b>Beam Divergence, Full Angle [ mrad ]</b>	< 2.0
<b>Spectral Linewidth [ nm ]</b>	< 0.1
<b>Polarization Ratio</b>	> 100 : 1
<b>Point Stability After Warm-up [ mrad ]</b>	< 0.05
<b>Noise of Amplitude [ rms ]</b>	< 1%
<b>Laser Head Dimensions [ mm ]</b>	320 [L] × 138 [W] × 120 [H]
<b>Power Supply Dimensions [ mm ]</b>	310 [L] × 165 [W] × 120 [H]
<b>Working Voltage [ VAC ]</b>	85~245, 50/60Hz
<b>Laser Gross Weight [ kg ]</b>	10.0
<b>Cooling Way</b>	Cooled by TEC and air
<b>Expected Lifetime [ hours ]</b>	> 10000
<b>Warranty Time [ year ]</b>	1

**Laser Head Dimension:**

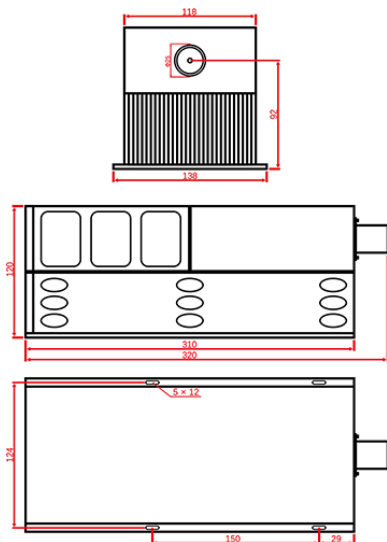

**Power Supply Dimension:**

