NEGATIVE ACHROMATIC LENSES

Specification

Material:	N-BK7 or Click this to Glass List
Dismension Tolerance:	+0 / -0.05mm
Foci Tolerance:	±1%
Center Thickness Tolerance:	±0.05mm
Centration:	3arc minutes
Surface Figure:	λ/4@632.8nm
Surface Quality:	40 / 20
Bevel:	0.25 × 45°
Clear Aperture:	>85%
Coating:	Specified by customer

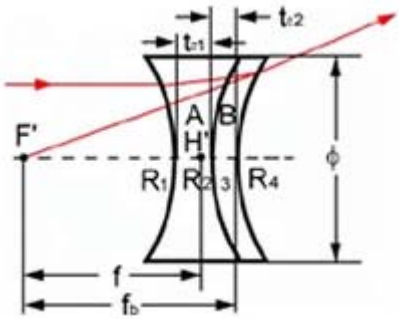

PRODUCTS LIST

Part No.	F [mm]	Dia [mm]	R1 [mm]	R2=R3 [mm]	R4 [mm]	Tc1 [mm]	Tc2 [mm]	Fb [mm]
SSL-RO-AN-001	-25	12.7	-15.60	13.09	44.16	3.00	2.67	-27.5
SSL-RO-AN-002	-40	12.7	-24.45	17.97	66.60	3.00	2.34	-42.5
SSL-RO-AN-003	-50	25.4	-31.19	24.89	85.31	3.00	4.22	-53.3
SSL-RO-AN-004	-55	38.1	-42.23	31.46	96.44	3.00	5.43	-62.3

TEL: + 86 - 21 - 56746019 Email: sales@sanctitylaser.com FAX: + 86 - 21 - 56641107
Address: 6F, Building 59, No.800 Hulin Road Shanghai China